


# Heatsink

Heatsink for COM Express Basic Embedded Computer Modules



Intel® Core™ i3, i5, i7 , Intel® Celeron® 800 series , AMD R-Series Generation

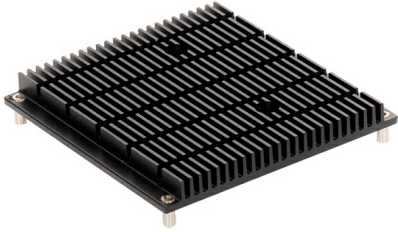

<b>Other</b>	
/	12VH DC Fan Voltage :12 Vdc, 5500rpm (cable length 200mm, w/3 Pin, Pitch:2.54mm connector)
<b>Material</b>	
/	Aluminum (COM Express Compact) Aluminum base 2mm~5mm with Thermal Stacks
<b>COM Basic</b>	
Standard	125(W) x 95(D) x 17(H) mm
Lite	125(W) x 95(D) x 12(H) mm
Pro	125(W) x 95(D) x 20(H) mm
<b>COM Compact</b>	
Standard	95(W) x 95(D) x 17 (H) mm
Lite	95(W) x 95(D) x 12 (H) mm
Pro	95(W) x 95(D) x 20 (H) mm
<b>COM Mini</b>	
Heatsink	84(W) x 55(D) x ***(H) mm

## Headquarter

10F-3, No.270, Sec.4,  
Chung Hsiao E, Rd.,  
Taipei, 10694, Taiwan

T +886 2 2751-7192  
E-mail: info@efco.com.tw

## EMEA

T +49-991-2009298-0  
E-mail: info@efcotec.com


## America

T +1-760-827-8600  
E-mail: sales-us@efcotec.com



Note : All product specifications are subject to change without notice

# Heatsink

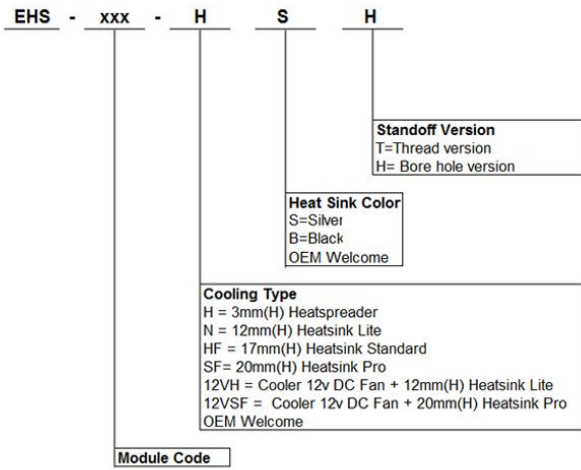

## Headquarter

10F-3, No.270, Sec.4,  
Chung Hsiao E, Rd.,  
Taipei, 10694, Taiwan

T +886 2 2751-7192  
E-mail: info@efco.com.tw

## EMEA

T +49-991-2009298-0  
E-mail: info@efcotec.com

## America

T +1-760-827-8600  
E-mail: sales-us@efcotec.com

**EFCO**  
EverFine Group