

XTX-Heatsink



Heatsink for XTX Embedded Computer Modules

Intel Atom™ N270, AMD Embedded G-Series APU, AMD® Geode™ LX 800

| Other | |
|----------|--|
| Others | 12VH DC Fan Voltage :12 Vdc, 5500rpm (cable length 200mm, w/3 Pin, Pitch:2.54mm connector) |
| Material | |
| Material | Aluminum |
| Heatsink | |
| Heatsink | 114(W) x 96(D) x 12(H) mm |

Headquarter

10F-3, No.270, Sec.4,
Chung Hsiao E, Rd.,
Taipei, 10694, Taiwan

T +886 2 2751-7192
E-mail: info@efco.com.tw

EMEA

T +49-991-2009298-0
E-mail: info@efcotec.com


America

T +1-760-827-8600
E-mail: sales-us@efcotec.com



Note : All product specifications are subject to change without notice

XTX-Heatsink

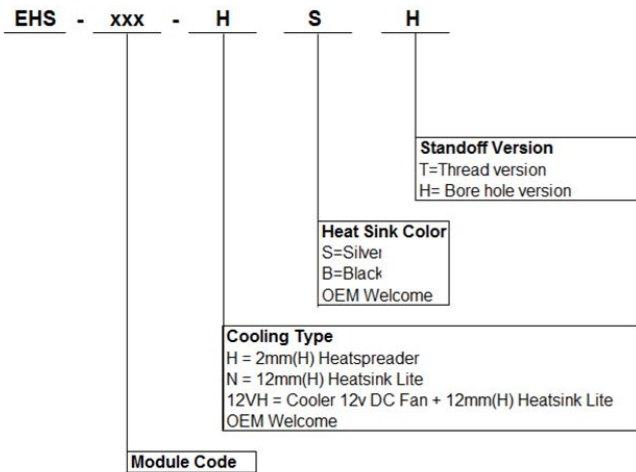

Headquarter

10F-3, No.270, Sec.4,
Chung Hsiao E, Rd.,
Taipei, 10694, Taiwan

T +886 2 2751-7192
E-mail: info@efco.com.tw

EMEA

T +49-991-2009298-0
E-mail: info@efcotec.com

America

T +1-760-827-8600
E-mail: sales-us@efcotec.com

